

## Installation / Installation / Instalación

### 2" Universal Flapper

2" Universel Bouchon


2" Universal Tapón



## Installation / Installation / Instalación

1. Remove old flapper carefully and use caution not to break ears (A)
2. Install new flapper bulb section down (B) by attaching ears over the arms (A) at base of overflow tube (G)
3. Position bulb section (G) in center of flush valve outlet (C)
4. Connect lift chain (D) to trip lever arm (E), being careful to adjust chain to correct length using the clip (F)

Note: The face of the flush valve outlet should be smooth and free from pits as this serves as a sealing surface for your toilet flapper.

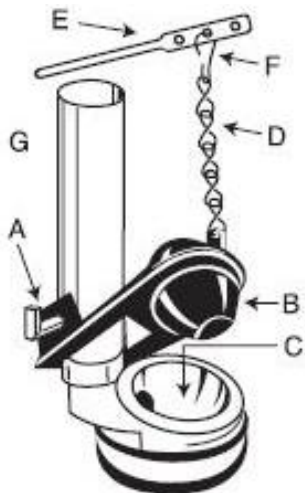

A	Ears/Arms
B	Flapper/Bulb
C	Valve Outlet
D	Lift Chain
E	Lever Arm
F	Clip
G	Overflow Tube